

RT1000P/K Product Brochure

Product Overview

The RT1000P/K is an excellent larger/commercial or heavy duty personal Stand-On Mini-Skid Steer, ideal for medium-duty construction, landscaping, and both residential and rural applications. Crafted with top-quality components and materials sourced globally, this model offers exceptional performance in one outstanding package.




Features:

- 25HP Perkins Diesel Engine
- 1000LB Rated Lift Capacity
- 5.8Km/h Max Speed
- 35.4" Width (36" with Bucket)
- 15Gal/Min Auxiliary Hydraulic Flow
- Standard 6.36CF Bucket Included
- 3390lb operating weight
- 2-Year Engine and Parts Warranty

Components:

- Pilot Controls (Left Joystick for all track movement)
- High Quality Hansa Italian Hydraulics
- Danfoss Hydraulic Drive Motors
- Boom Float Function
- Hydraulic Oil Cooler
- Raised Drive Motors
- 25L Diesel Fuel Tank
- 3.98Psi Ground Pressure
- Cushioned Non-Slip Foot Pedal
- Easy Access Engine Compartment
- Standard (CII) Attachment Plat

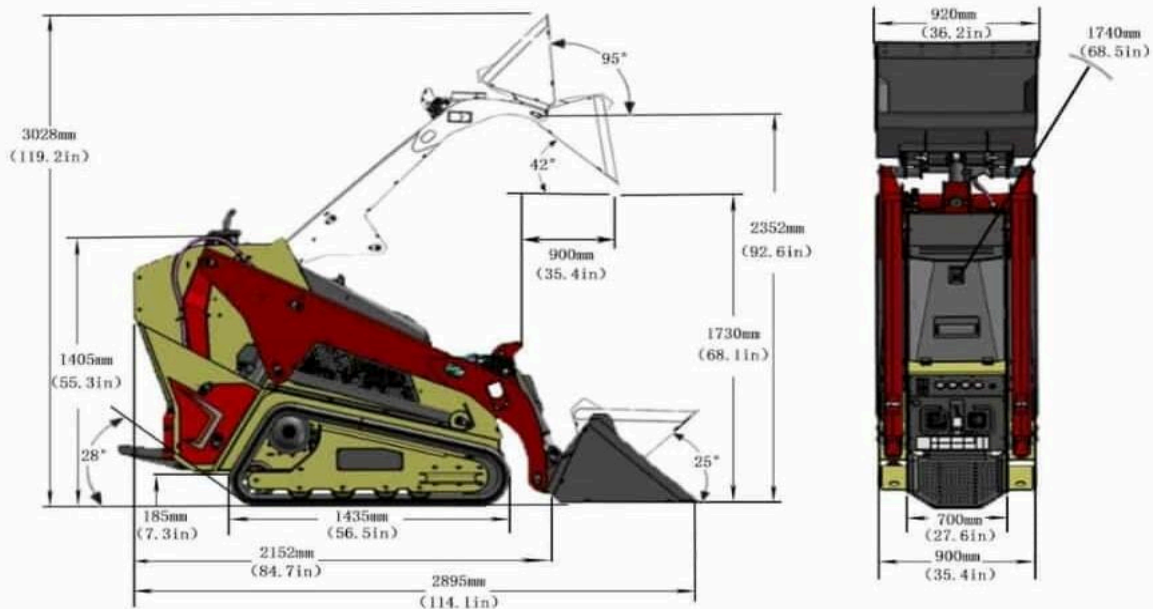

Item	V1000	
	With Rubber Track	
	Kubota D902-E4B-THM-1/Perkins 403J-11	
	Metric	U.S.
Key Specifications		
Rated Power (KW)	18.4(25Hp)	
Operating Weight	1538 Kg	3390 Lb
Rated Operating Capacity	454 kg	1000 Lb
Ground Pressure (Rubber)	2800 Kg/m²	3.98 Psi
Auxiliary Hydraulic Flow	56.8 L/Min	15 Gal/Min
Auxiliary Hydraulic Pressure	19.3Mpa	2800Psi
Rotating speed (Rpm)	Kubota:3600 Perkins:2800	
Noise (Db)	≤95	
Engine		
Emissions Tier	EU NRM 97/68/EC Stage 5	
Engine Cooling	EPA Tier 4 Final	
Engine Fuel	Liquid	
Engine Fuel	Diesel	
Displacement	1.131 L	69 in³
Number of Cylinders	3	
Performance		
Tipping Load	1315 KG	2898 Lb
Travel Speed	5.8 Km/h	3.52 Mph
Travel Speed - Reverse	3.9 Km/h	2.4 Mph
Attachment Mounting System	CII (Common Industry Interface)	
Capacities		
Fuel Tank	25 L	6.6 Gal
hydraulic system		
Hydraulic oil tank capacity	22 L	5.8 Gal
Pump Capacity	45 L/ Min	12 Gal/Min
System Relief @ Quick Couplers	200 Bar	2900 Psi