

RT450H Product Brochure

Product Overview

The RT450 is an excellent mid-range Mini-Skid Steer, ideal for medium-duty construction, landscaping, and both residential and rural applications. Crafted with top-quality components and materials sourced globally, this model offers exceptional performance in one outstanding package.




Features:

- 25HP Honda Engine
- 992LB Lift Capacity
- 5.5Km/h Max Speed
- 40.6" Total Width
- 52L/m/13.74G/m Hydraulic Flow
- 4.59 cubic foot bucket capacity
- 2557lb operating weight
- 2-Year Engine, 1-Year Parts Warranty

Components:

- 25HP Honda GX690 Engine
- High Quality G5 Triple Pump/Valve
- Danfoss Hydraulic Drive Motors
- Auto-Leveling Attachments
- Hydraulic Oil Cooler
- Raised Drive Motors
- Raised Fuel Tank for Consistent flow
- Easy Adjust Track Tension
- Cushioned Non-Slip Foot Pedal
- Low Ground Pressure
- Easy Access Engine Compartment
- Standard (CII) Attachment Plate

Details

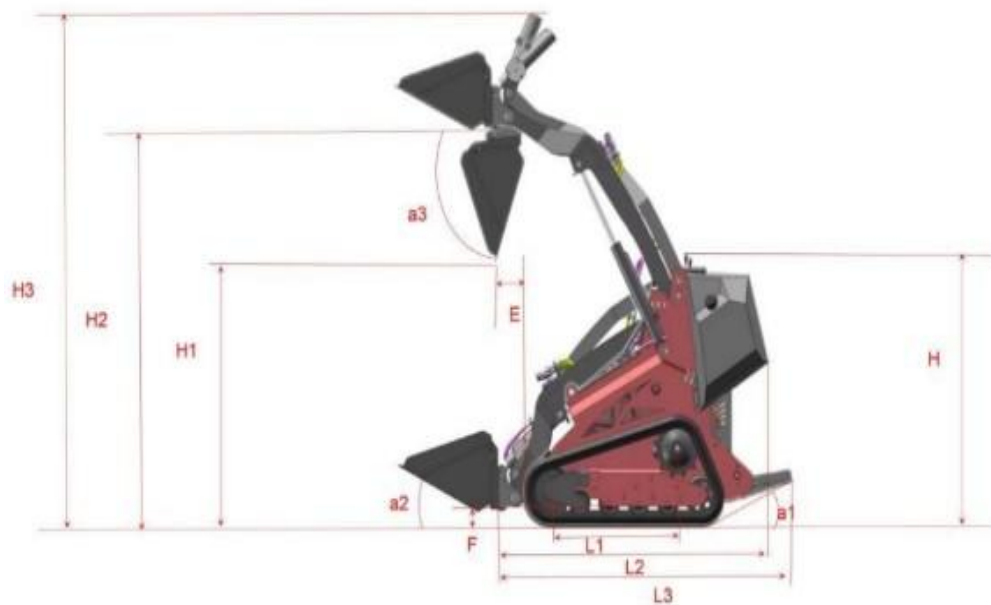

Item	DRT 450	
	With Rubber Track	
	Metric	U.S.
Max working height (H3)	2474 mm	97.4 inch
Max pin height (H2)	1977 mm	77.83 inch
Max Dumping height (H1)	1275 mm	50.2 inch
Max Dumping distance(E)	175 mm	6.89 inch
Max Dumping Angle (a3)	70°	70°
Rollback of bucket on ground (a2)	25°	25°
Departure angle (a1)	23°	23°
Total height (H)	1300 mm	51.18 inch
Ground clearance (F)	120 mm	4.72inch
Wheel base (L1)	890 mm	35.04 inch
Overall length without bucket (L3)	1767 mm	69.57 inch
Total width (B2)	1030 mm	40.55 inch
Bucket width (B1)	1070 mm	42.13 inch
Total length with bucket (L)	2319 mm	91.3 inch
Turn radius forward turning (R)	1440 mm	56.69 inch
overall length without the bucket after folding the pedal. (L2)	1633 mm	64.29 inch

